


# NEW PRODUCT

## SAME GREAT SERVICE


### REMOVABLE TORFLEX SPINDLES ARE NOW AVAILABLE AS AN OPTION ON #9, #10, #11, AND #12 DEXTER TORFLEX AXLES

- Future repair costs are reduced by replacing a damaged spindle and not the entire axle beam
- No special tools required to remove the stainless steel bolt
- "D" washer and detent groove design ensures proper mounting with no measuring
- All replacement spindles are EZ-LUBE with a brake flange
- Spindles fit left-hand or right-hand applications
- Replacement spindles will only fit Dexter Torflex axles with the removable spindle option, available beginning early 2014

Ref. #	Part #	Description
164550	K71-742-00	#9 TORFLEX 2.2K, EZ-LUBE, FLANGED
164551	K71-743-00	#10 TORFLEX 3.5K, EZ-LUBE, FLANGED
164552	K71-744-00	#11 TORFLEX 6K, EZ-LUBE, FLANGED
164553	K71-745-00	#12 TORFLEX 7K, EZ-LUBE, FLANGED

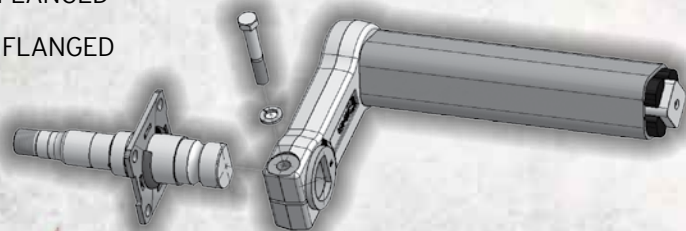

- ④ Ability to replace a damaged spindle in the field greatly reduces repair costs by not having to replace the complete axle.
- ④ With only one bolt to remove, the procedure is quick and easy.
- ④ Removal of the spindle requires no special tools.
- ④ A positive spindle location with “D” washer design ensures proper brake flange location for brakes and E-Z Lub<sup>e</sup> hole.
- ④ Positive depth location with clamping bolt and detent groove takes out the guess work with no measuring required.
- ④ Clamping bolt and washer are made of stainless steel to resist corrosion resulting in easy removal.
- ④ One spindle will replace either side, no need to order a left hand or right hand side.

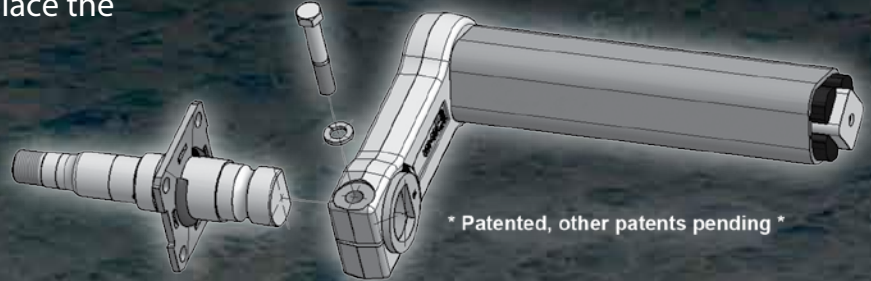

## FAQs

### Can I add this feature to my existing axle?

No, if your axle is not equipped with the removable spindle option, it cannot be added.

### Do I have to replace the hubs?

Only if they have been damaged, but you should replace bearing cones, cups and seals.

### Can the arm assembly be replaced?

No, it is welded in place.

### Can I change to a larger size spindle?

No, each size spindle is made for a specific axle.

### Can I change the axle starting angle?

No, the angle is not adjustable.

### Will my old hubs fit my replacement spindle?

Yes, the new spindles are sized for the axle capacity.

### Do I need special tools to change the spindle?

No, standard hand tools are all that is required.

### I can't get the spindle out of the hole.

Follow the Installation/Removal procedure instructions. You may need to drive the wedge in deeper. If rusted, spray with penetrating oil.

### The threads are damaged in the arm, can I repair them?

Yes, try cleaning up the threads with a 1/2"-20 thread tapping die.

### How long will it take to replace one spindle?

Approximately 15 minutes after hub or hub, drum & brake removal.

### Where can replacement spindle kits be purchased?

Any Redneck Trailer Supplies location.